

## Teflon Probe C3G 6/10 T




Level control for:

- waxes
- paints
- hot-melt adhesives
- chemicals

### Technical data:

Material	Teflon(PTFE), nickel-coated brass
Type of protection	IP64 / EN40050
Installation position	As desired, vertical position preferred
Environment temperature	0°C to 250°C
Installation accessories	1 nut M18 X 1
Cable length	1 m

### Dimensions:

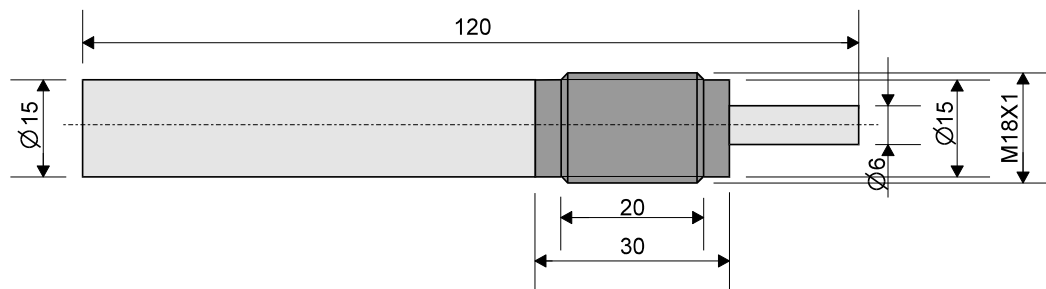

### Operating Instructions:

#### Mounting instructions

The probe is only to be used together with the type CNS-SV 25 T device. To avoid damaging the probe due to suction effects caused by the colling of the hot materials, it is necessary to spring mount the probe. The probe cable is not to be laid parallel to the driving cables.

#### Operation

The scope of use comprises the liquid and solid medium with a maximum temperature of 250°C. During the functional test (setting), it is imperative that the test only be carried out

using the medium which was actually called up.

#### Maintenance

The probes are maintenance-free. Devices are only to be repaired or overhauled by the manufacturer.

#### General

Our devices are of a high technical quality. We reserve the right to make technical alterations which are designed to meet technical progress.

## Tippkemper Elektronik GmbH & Co KG

Zum Kreuzweg 12 D-59302 Oelde Tel. +49 (0) 25 29 / 93 01-50 Fax. +49 (0) 25 29 / 93 01-49